

INDIVIDUALS EQUIPMENTS

C-8+ openable swivel Quick Link

Allow to attach the CLiC-iT to the harness



C8+



QUICK LINK

C-HOLDER & C-TWO

Equipment carrier allowing to hold the CLiC-iT equipment



C-HOLDER



C-TWO

C-0 // C-1 slings

Allow to attach C-Zip, CLiC'N'ZiP & CLiC-iT to the harness



C-0



C-1



SLINGS

ENABLES THE CLIC-IT SYSTEM TO REACH THE HEIGHT OF THE SAFETY CABLE

Conforme à la réglementation :
EN 566: 2006, 22kN

ANNEAU DE MONTAGNE C-0



ÉLINGUE C-1



SWIVELS

ALLOW FREE ROTATION PREVENTS THE LANYARD FROM TWISTING

C-8 Swivel

CE 24kN



C-8+ Openable swivel


CE 25kN



QUICK LINK

MATERIAL
Stainless steel

CE 45kN



MODEL	REFERENCE	AVAILABLE LENGTHS	FUNCTIONAL HEIGHT	OPENING	WEIGHT
SLING C-0	DAS060-L*	20cm - 27cm 35cm - 45cm			
SLING C-1	DAS060EL-CIL-L*	55cm - 70cm 90cm - 110cm			
C-8	DAS070		52mm	/	90g
C-8+	DAS132		57mm	13mm	115g
QUICK LINK	MRNI07.0		51mm	8.5mm	52g

*L = Length of mounting ring or sling (cm)
Example: DAS060EL-CIL-55 for a 55cm C-1 sling



C-8+





C-TWO

OTHER ACCESSORIES

C-HOLDER

C-ZIP, RIDER AND CLIC'N'ZIP EQUIPMENT CARRIER

- ✓ Pulley is easy to place on the harness & to remove from it
- ✓ Easy to fix on any harness
- ✓ Limits the risk of the pulley being caught
- ✓ Prevents the pulley from remaining attached to the equipment-carrier during a zipline

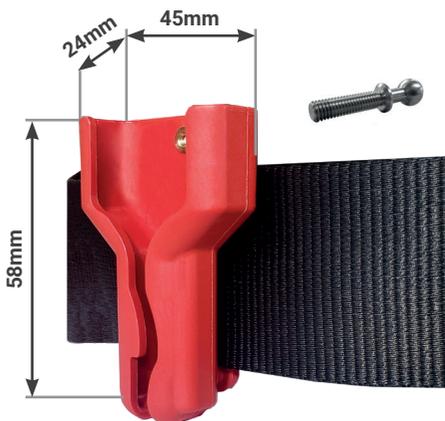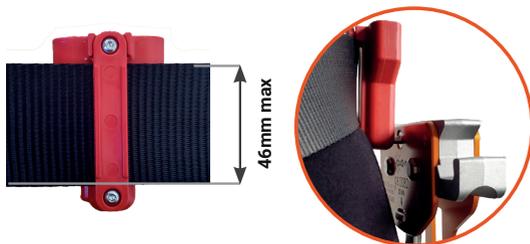

C-TWO EQUIPMENT CARRIER

- ✓ Allows to hold the connectors or the C-ZiP pulley on the side of the harness between the courses
- ✓ Adapts to all types of harness
- ✓ Avoid to drag the connectors on the ground
- ✓ Easy fastening on the harness



MODEL	REFERENCE	COMPATIBILITY
C-TWO	DAS046	  
C-HOLDER	DAS355	  

• Position of the C-HOLDER on the pulley

— The use of the C-HOLDER on C-ZiP XTREM pulley or CLIC'N'ZIP lanyard you already have (previous models) requires that you return it to the workshop for modification to ensure optimal compatibility

PARK EQUIPMENTS

MONKEY HARDWARE

Climbing hold



C-CONNECT

Allow the hanging of the CLiC-iT connectors onto non-ferromagnetic parts of the course



C-STOP

Non-return mechanical stop allowing the stop during a fall



BRIEFING SIGNS



C-ZAM RINGS

Magnetic rings allowing the anchor detection of the CLiC-iT connectors



C-RACK

Storage rack for lanyards




C-OFF

Course way out allowing to remove the both connectors



C-ZAM L+

MAGNETIC RINGS FOR CLIC-IT CONNECTOR ANCHOR DETECTION



Even easier anchor detection,
with an optimized connection zone



Available in 5 colors:



IN +

C-ZAM RESCUE RESCUE RING





- ✓ Always have a C-ZAM ring on hand for rescues
- ✓ Clings to the belt, harness or keychain

C-ZAM RiDER

MAGNETIC RINGS ALLOWING THE ANCHOR DETECTION OF THE CLIC-IT CONNECTORS COMPATIBLE WITH THE CLIC-IT RiDER

- ✓ Allows the use of the CLIC-IT and the CLIC-IT RiDER on the same route
--> Adults can accompany kid(s) without changing their own equipment
- ✓ The participant can go to the right or to the left of the ring a once connected

Available in 5 colors



MODEL	REFERENCE	COMPATIBILITY
C-ZAM L+	DAS148C*	
C-ZAM RiDER	DAS451C*	
C-ZAM RESCUE	DAS194	

*C = Color B = Blue; V = Green; N = Black; J = Yellow; R = Red // Example: DAS148-V for a green C-ZAM L+ Ring



C-CONNECT

ANCHOR POINTS

Enable the hanging of the CLiC-iT connectors onto non-ferromagnetic parts of the course
(with C-ZAM L+ ring for 25 and CLiC'N'ZiP models - order separately)



C-CONNECT 25

- ✓ Made of cataphoresis steel wire Ø12
- ✓ Simplified briefing. The user connects only to the C-ZAM L+ rings
- ✓ Once the first CLiC-iT connector is attached, it slides naturally to make the ring accessible to the second connector

CE 25kN



C-CONNECT CLiC'N'ZiP

- ✓ Made of cataphoresis steel wire Ø12

15 kN



C-CONNECT V2 & V2+



- ✓ In forged aluminium
- ✓ Ideal for «Tarzan jump» type workshops and fall arrest systems

CE 20 kN

C-CONNECT V2 C-CONNECT V2+

MODEL	REFERENCE	WEIGHT	COMPATIBILITY
C-CONNECT 25	DAS346	490g (without ring)	
C-CONNECT CLiC'N'ZiP	DAS184	450g (without ring)	
C-CONNECT V2	DAS170	135g	
C-CONNECT V2+	DAS175	140g	

C-ZAM L+ RING

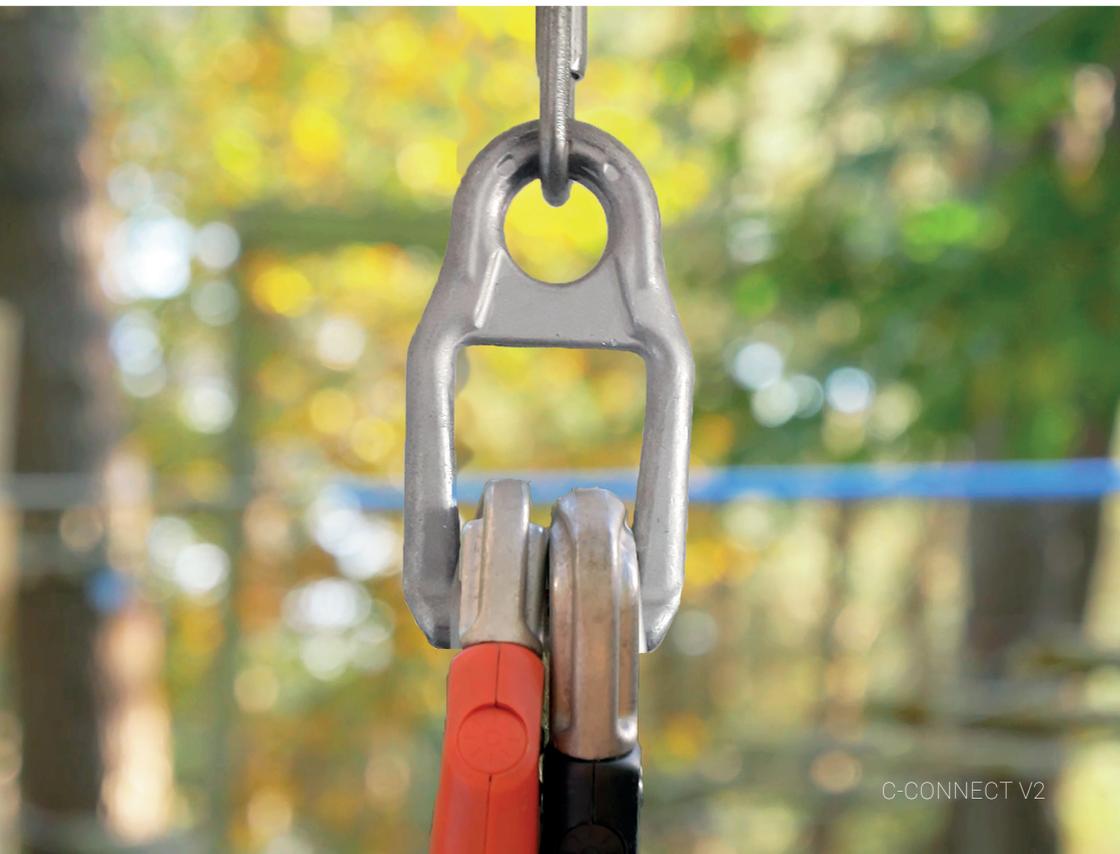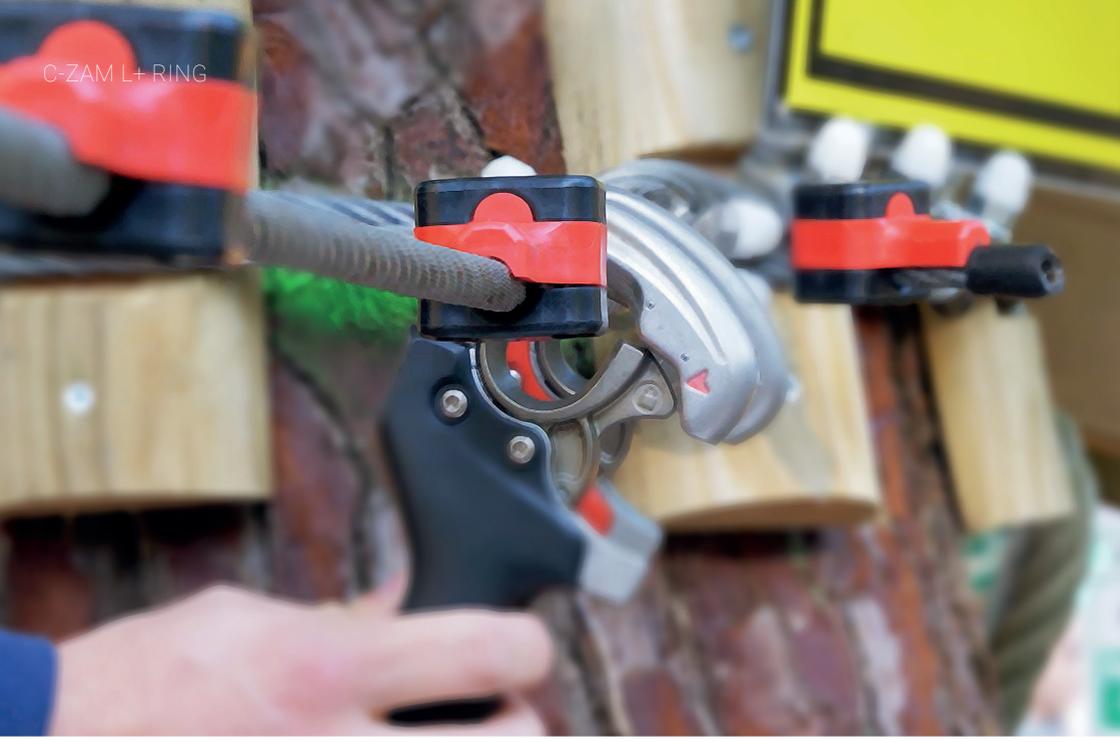

C-CONNECT V2

OTHER COURSE ELEMENTS

C-OFF COURSE WAY OUT

- ✓ Allows the removal of the connectors from the safety cable at the entrance and at the exit of a course
- ✓ This accessory must be positioned on the safety cable only at ground level



C-STOP NON-RETURN MECHANICAL STOP

- ✓ Allows the use of CLiC-iT connectors on sloping courses, while acting as a stop during the fall
- ✓ To be installed on a sloping course with a maximum angle of 35°



MODEL	REFERENCE	COMPATIBILITY
C-OFF	DAS044	
C-STOP	DAS075	

MONKEY HARDWARE®



«MONKEY» STAND & «CAMP» HOLD

Climbing hold easy to attach
on trees and to carry

- ✓ Hand and foot hold
- ✓ Climbing height: about 11 meters
- ✓ Suitable for children and beginners
- ✓ Weatherproof
- ✓ Certificated DIN EN 12572-3 & EN 1176.1

RATCHET STRAP

Steel ratchet attachment strap with
integrated locking system

- ✓ Evolutionary tightening of the straps to respect the growth of the support shaft
- ✓ Easy fixing and settings
- ✓ Optimum security
- ✓ UV resistant and allowing a lasting use on trees
- ✓ Certificated DIN EN 9001:2000, ISO/TS 16949/2002



PACK «CAMP»

- ✓ 27x 3,2m ratchet straps
- ✓ 27x « Monkey » stands
- ✓ 25x Yellow Camp hold
- ✓ 25x M10 threaded screw
- ✓ 1x 6mm Allen key
- ✓ 1x carry bag



EXTENSION PACK «MAXICAMP»

- ✓ 27x « Monkey » stands
- ✓ 25x MaxiCamp hold
- ✓ 25x M10 threaded screw
- ✓ 1x 6mm Allen key
- ✓ 1x carry bag



MODEL

REFERENCE

«CAMP» PACK

1410322-J

«MAXICAMP» PACK

1411000-O

C-RACK

STORAGE RACK FOR LANYARDS



OPTION

Inflated wheels
For unstable ground

- ✓ Allows the storage of 80 CLiC-iT lanyards and preserves the lanyards control cables
- ✓ 100% stainless steel



Lanyard storage



MODEL

REFERENCE

COMPATIBILITY

C-RACK

DAS280

C-RACK + Option


DAS287



C-UP + C-ABS**VERTICAL ANCHOR POINT**

C-ZAM L+ ring
(to be ordered separately)

Steel cable
Ø 10mm - Ø 12mm

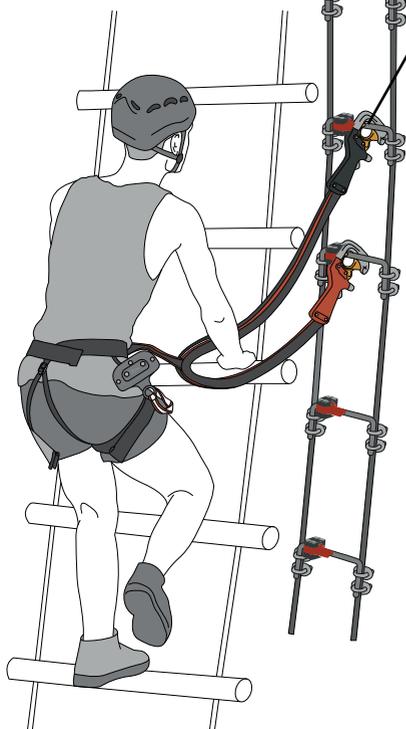**C-UP****MAGNETIC VERTICAL POINT**

- ✓ Facilitates progression
- ✓ Avoid twisting lanyards to connect
- ✓ No height limit
- ✓ No maintenance

C-ABS**SHOCK ABSORBER**

- ✓ Absorbs shock in the event of a fall
- ✓ Compliant with EN355:2002
- ✓ Check regularly and replace every year

MODEL	REFERENCE	COMPATIBILITY
C-UP	DAS193	
C-ABS	DAS192	

