



## Instructions of use

- Multi-drilling tool
  - for creating a precisely fitting stepped hole





Copyright © 2023 Kletterwald Plochingen GmbH

No part of this publication may be reproduced, stored in a database or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Kletterwald Plochingen GmbH.

These installation instructions must be read before installation in order to guarantee safe handling of the Kletterwald Plochingen product.

The builder must make these installation instructions available to the installer and ensure that the installer has read and understood them.

Keep the installation instructions in a safe place for later use. Leave a clearly visible notice in the work area indicating the storage location.

The following technical standards and accident prevention regulations must be observed when installing and checking the Babo:

BGI 533 Safety when working with hand tools

DGUV rule 112-192 Use of eye and face protection


BG rule Use of protective gloves

3.21 Hand-held machines (Class No. 61)

EN 61029-1:2000-05 Safety of transportable power tools

BGHM Arbeitsschutz Kompakt No. 011 Working with hand drills

EN 15567-1:2020-05

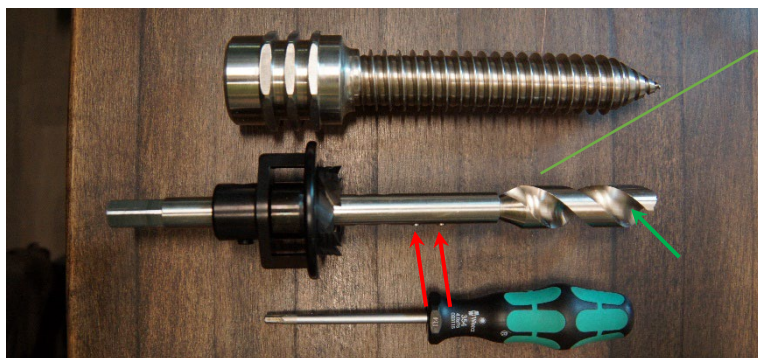


Select the drill diameter that matches the screw.

The **multi-drill bits** can be changed by loosening the **two Allen screws**



**IMPORTANT:** Before tightening the two Allen screws, align the surface of the drill shaft (hexagon) perpendicular to the two Allen screws.

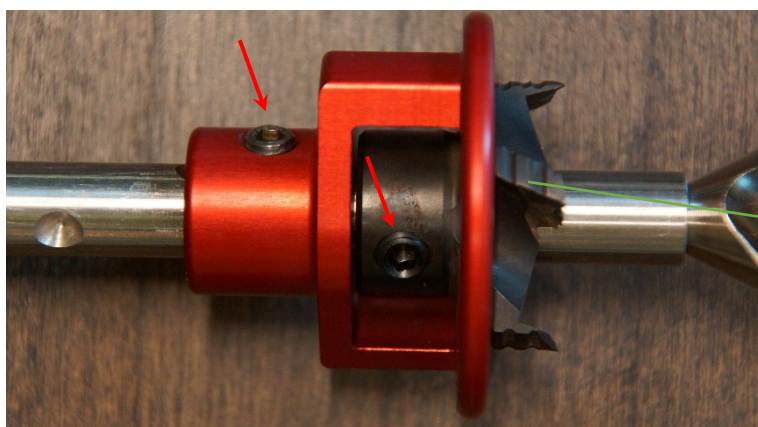

Determine the position of the countersink and the depth stop in accordance with the screw type.



The position of the countersink and the depth stop can be adjusted to the screw length by loosening the two **grub screws**.

A multi-stage hole is now drilled in accordance with the installation instructions for platform bolts using a battery-powered screwdriver with spirit level or a drilling device.

Drill-driver recommendation: use a recommended drilling torque of 800Nm (maximum 1000Nm). Caution: if the machine is too powerful or the torque is not respected, the drill bit and accessories may break.



**NOTES:**

---

---

---

---

---

---

---

---

Many thanks for your confidence in our products.

We hope that you were satisfied with the information and instructions you received and that you were able to carry out the installation successfully.

Should you require any further assistance, please do not hesitate to contact us at any time

phone                    +49 (0)152-34168948

mail                     [office@babo-solutions.de](mailto:office@babo-solutions.de)

[OR](#)

CliC-iT  
+33 (0)3 26 47 11 34  
[contact@clic-it.eu](mailto:contact@clic-it.eu)

Good luck for your installation of our babo!

« Rev B // 26-03-2025 »