



CLiC-iT
ADVENTURE & MOUNTAIN
CATALOGUE EDITION 2026



CLIC-IT ADVENTURE

INTERACTIVE
CONTINUOUS



CLIC-IT RIDER

CONTINUOUS BELAY
SYSTEM WITH PULLEY




ROPEROLLER

CONTINUOUS SAFETY
SYSTEM



CLIC-IT EASY DÉBRAYABLE

CONTINUOUS BELAY
SYSTEM WITH HOOK

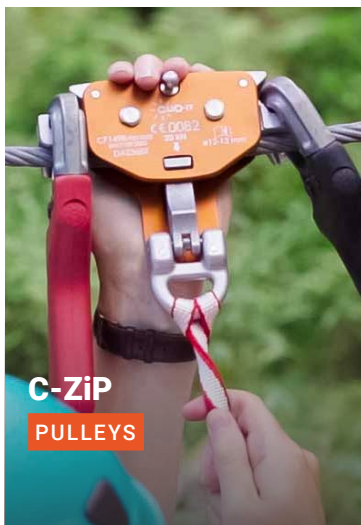

C-ZIP

PULLEYS



C-BODY

INTEGRAL HARNESS



C-PASS

PREVENTS ENTERING
THE COURSE WITHOUT
BEING ATTACHED



RODÉOSTOP®

AUTOMATIC FALL
ARREST DEVICE



BABO® BOLT

TREE ATTACHMENT
SOLUTION

SUMMARY

P. 4 THE COMPANY
P. 10 CLiC-iT ADVENTURE
P. 14 CLiC'N'ZiP
P. 16 CLiC-iT RiDER
P. 19 CLiC-iT EASY
P. 20 ROPEROLLER

**CONTINUOUS
BELAY SYSTEMS**

P. 21 C-ZiP

PULLEYS

P. 26 C-BODY

HARNESS

P. 28 C-PASS ZiP

**ACCESS CONTROL
SYSTEMS**

P. 29 C-PASS ACCESS

P. 31 RODÉOSTOP®

FALL ARREST SOLUTION

P. 33 BABO® BOLT

**TREE-ATTACHMENT
SOLUTION**

**P. 37 INDIVIDUAL
EQUIPMENT**

ACCESSORIES

**P. 41 PARK
EQUIPMENT**



Please read the users manuals very carefully to choose available options and use the products correctly
 Images are non contractual

HISTORY

A FRENCH INVENTION



«While on an adventure course, trying to help a child who was stuck, I found myself in a dangerous situation. Then I imagined my children completely detached from the safety cable, 25 meters up in a tree... I started spending all my evenings and weekends looking for a solution to this problem! »

CLiC-iT® is a revolutionary solution that has given rise to a complete line of products made to serve different needs in the fields of recreation, construction, and industry.

Thierry Dehondt
CEO

OUR COMMITMENT

PEACE OF MIND

We are dedicated to providing peace of mind, total freedom and maximum efficiency to those who have activities at heights.

To do this, we want to give you the best: safety, highest longevity, easy of use & customer service.

CLiC-iT proposed innovative, simple and reliable solutions to ensure continuous safety for the user throughout the adventure, a real guarantee of peace of mind for the adventure park manager.

OUR EXPERTISE


INNOVATION & QUALITY

Our team develops innovative, patented products that meet the various safety needs identified in the field. In order to meet your expectations, all our concepts are tested on site to ensure their relevance and efficiency.

CLiC-iT guarantees robust, high quality materials for a long life and increased resistance of the products. CLiC-iT is also a team that is always ready to listen to you for a better service.



CLIC-IT PRESENCE IN THE WORLD

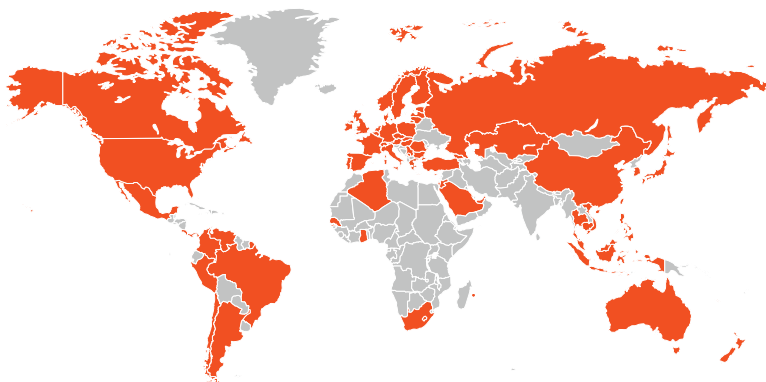

C-PASS ZiP

System that prevents collisions on ziplines



C-ZiP

Range of pulleys for ziplines



RODÉOSTOP®

Automatic fall arrest device with energy absorber



BABO® BOLT

Tree attachment solution



CLiC-iT RiDER

Continuous belay system with pulley





The most complete range of solutions for adventure parks

C-BODY

Full-body harness



CLiC-iT

Communicating,
dual-leg lanyard





XAVAGE, MEXIQUE



FLAGSTAFF EXTREME, FLORIDE



MAGIC JUNGLE, SHANGHAI



LE POISSON VOLANT, FRANCE



VIA FERRATA
IN TERRA CORSA, FRANCE


CONTINUOUS BELAY SYSTEMS

Six solutions for all your needs

INTERACTIVE

CLiC-iT ADVENTURE

The most ergonomic and robust solutions

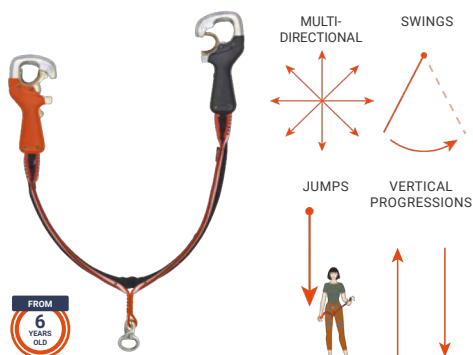

CLiC'N'ZIP



WITH PULLEY


CLiC-iT RiDER

The smoothest solution



ROPEROLLER

The solution designed to last

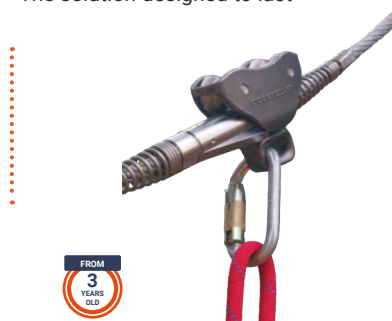

WITH HOOK

CLiC-iT EASY & CLiC-iT EASY RELEASE

The simplest solution




CLIC-IT ADVENTURE

THE MOST SIMPLE, ROBUST AND ECONOMICAL CONTINUOUS INTERACTIVE BELAY SYSTEM

What is it ?


1 INTERCONNECTION

*OPENING ONE CONNECTOR
AUTOMATICALLY LOCKS THE OTHER ONE*

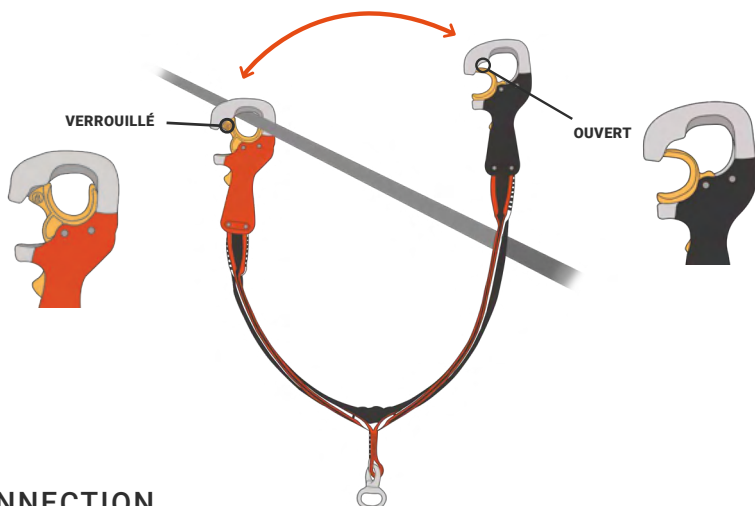


2 CONNECTION

Thanks to its anchorage detection, the CLiC-iT can only be connected on the safety line or on the C-ZAM rings. It prevents the user from connecting in the wrong place.

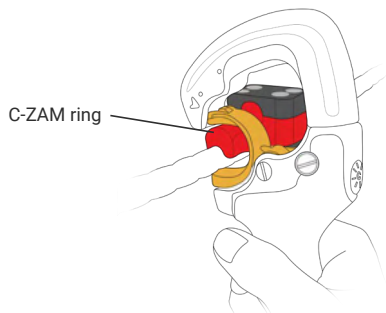

3 DISCONNECTION

Disconnection of the CLiC-iT is possible only if the trigger is pressed.



The **3** safety mechanisms of CLiC-iT

CLiC-iT lanyards feature three independent safety mechanisms that ensure maximum protection for the user at every stage of the journey. These simple yet ingenious mechanisms earned the CLiC-iT the 'Product Winner' award in the 'Innovation' category at the 2016 IAPA AWARDS.




The **design** of CLiC-iT

The design of CLiC-iT has been awarded the 2018 label of the Observateur du Design, the most important French design award.



CLiC-iT Advantages

OPENING ONE CONNECTOR AUTOMATICALLY
LOCKS THE OTHER ONE

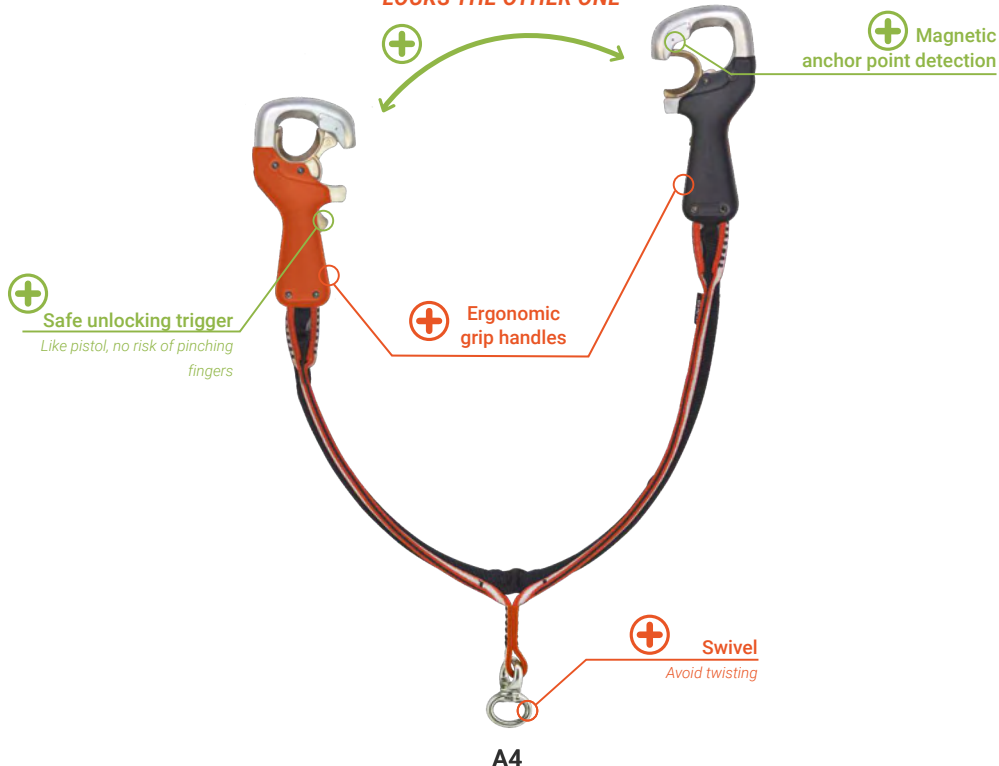

EASY TO USE

- From the age of 4
- With one hand
- One single manipulation to unlock one of the 2 carabiners



SAFE

- D safety level
- (Compliance with EN17109)
- 3 independant safety mechanisms



RELIABLE, DURABLE & ECONOMICAL

- High-grade materials paired with a simple mechanism
- Bowden cables are always pulled (*not pushed*)
- Few mobile parts, exceptionally durable & easy to repair
- Easy inspection and maintenance on site
- Second generation CLiC-iT in operation since 2017
- 4 years warranty (*Europe*)



C-ZAM L+ ring



Ensures that participant only connects on the safety line



Choose the right CLiC-iT

CLiC-iT ADVENTURE ROPE COURSE PARK


CONNECTION TO THE HARNESS
(Choose)



C-8 SWIVEL



C-8+ OPENABLE SWIVEL

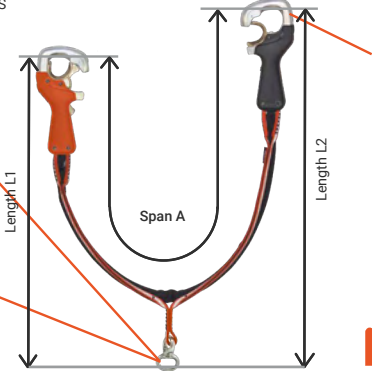


OPTIONS



Anodisation
Anti-corrosion
coating

CLiC-iT MOUNTAIN VIA FERRATA



WITH ENERGY ABSORBER

CLiC'N'Zip WITH INTEGRATED PULLEY



SEE FOLLOWING PAGES

REFERENCE	A	L ¹	L ²
A4 (recommended for kids)	110cm	63cm	73cm
A6 (recommended for kids)	150cm	76cm	99cm
M8 (Via Ferrata)	110cm	110cm	110cm


ANCHOR DETECTION (Choose)

Version	Steel cable	C-ZAM L+
1	✓	✓
2	✗	✓

CLIC'N'ZIP

CONTINUOUS INTERACTIVE BELAY SYSTEM WITH INTEGRATED PULLEY

- No more need for a third lanyard for the pulley
- Simplified briefing
- Simplified rescue for the operator on the ground
- From 9 years old

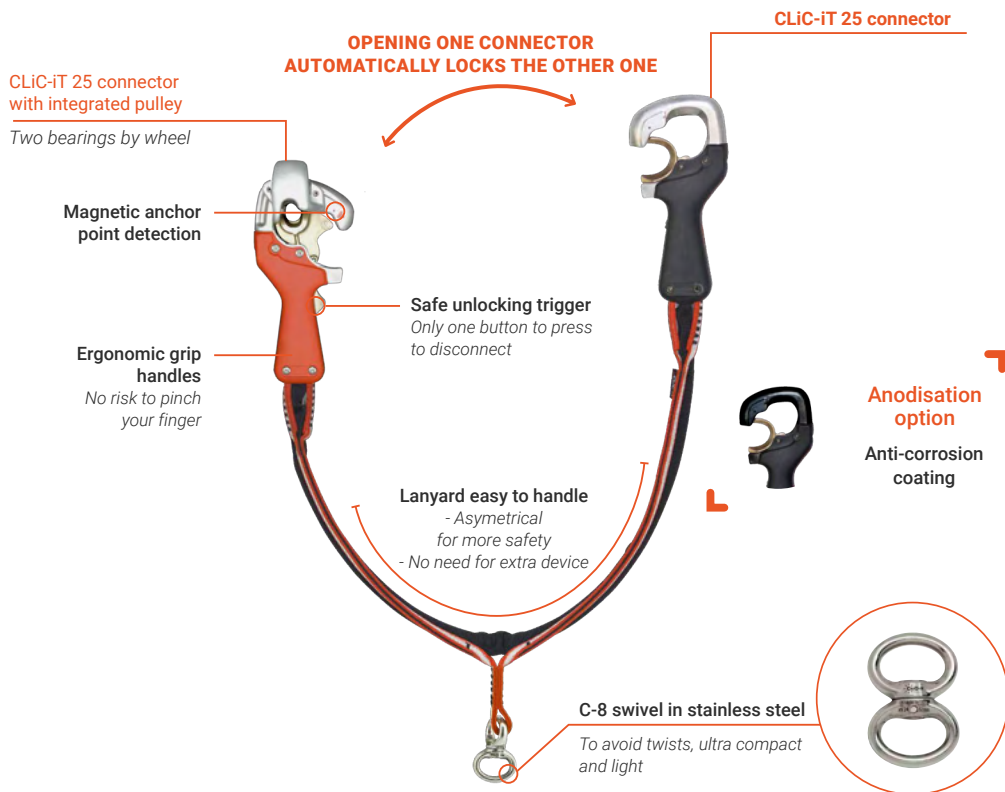

MATERIALS

- Forged aluminium housing
- Copper-aluminium alloy mechanism
- High-strength PA grip handles reinforced with glassfibre
- Dyneema®/Spectra® sling


TOTAL WEIGHT

1.5kg

Zipline maximum length:



CLIC'N'ZIP CONNECTOR: A REAL PULLEY

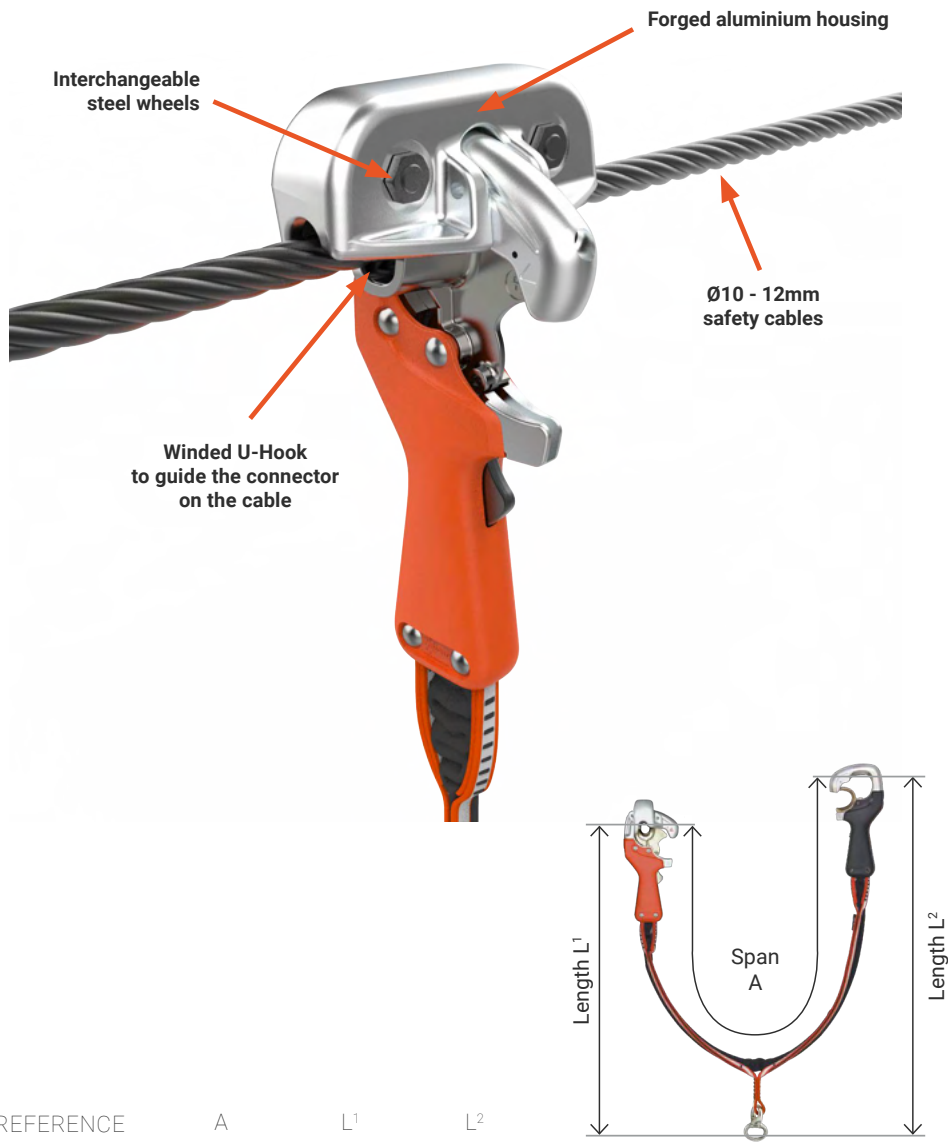

REFERENCE	A	L ¹	L ²
A4x25 ZiP	110cm	63cm	73cm
AJx25 ZiP	130cm	66cm	89cm
A6x25 ZiP	150cm	76cm	99cm

CLiC-iT RiDER

THE SIMPLEST AND SMOOTHEST PPE SOLUTION

- **Simple:** the user has nothing to manipulate
- **A single PPE for challenges and ziplines**
- **Intuitive:** reduced briefing
- **Ergonomic** and easy to use: from 3 years old
- **Quiet**
- **Low maintenance**

Smooth progression on cable

Stability

The center mass of the pulley prevents it from turning on the cable and shocks on the anchors



Easy & quick rescue

Magnetic locking system

Impossible to open the pulley when a carabiner is connected

Indicateur d'usure



Nylon wheels

Reduces noise, weight and cable wear




Zipline maximum length:



MODEL	REFERENCE	WEIGHT
CLiC-iT RiDER	DAS436	534g

EASY INSTALLATION

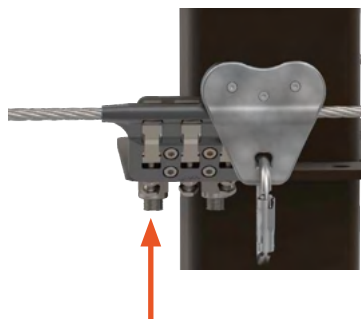

Closed anchor

No need to crimp the cable
Easy adjustment and control of the cable
Will not slip with time

Positioner

To ensure a smooth pulley trajectory

For Ø12mm steel cable

Type 6x19 with full steel core



COMPATIBILITY



CLiC-iT thanks to
C-ZAM RiDER

PAGE 43



Equipment carrier
C-HOLDER

PAGE 40

MONTAGES POSSIBLES



With
SLINGS



With
BABO BOLT



On
CABLES



CLIC-IT RIDER




CLIC-IT EASY DÉBRAYABLE

CLIC-IT EASY

THE SIMPLEST HOOKED CONTINUOUS BELAY SYSTEM

This is the Hironde system, in partnership with Pornic Aventure, in service since 2017

- Economical and robust
- Available with a fixed or disengageable hook
- Made from lightweight aluminum (200g)
- Easy to use : from 4 years old
- Quick and easy installation

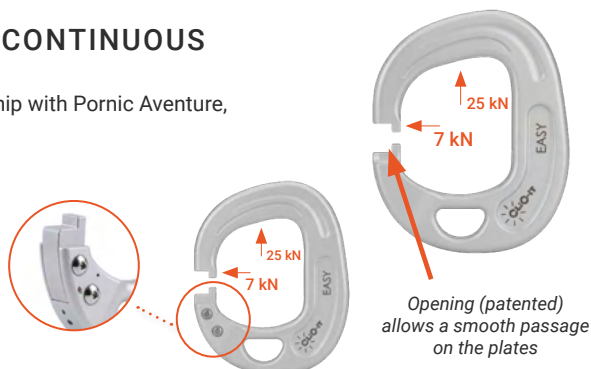

Hook EASY Release

Robust and efficient



*Padlock evacuation point
Easy to use*



*Bifurcation cross (patented)
Obstacle bypass and evacuation
possible with no moving parts*



*Resistant to rust
All our plates are made
of stainless steel
For safety line cable
Ø 12mm and Ø12,7mm*

C-STOP

Prevents the user from sliding backward on an inclined cable



Switch EASY

Allows temporary disconnection from the lifeline



MODEL	REFERENCE	WEIGHT
CLIC-IT EASY	DAS670	200g
CLIC-IT EASY Release	DAS732	255g
Switch EASY	DAS689	980g
Padlock evacuation point	DAS738	
Bifurcation cross	DAS674	
C-STOP	DAS1160	

ROPEROLLER & SLIMROLLER

THE CONTINUOUS SAFETY SYSTEM DESIGNED TO LAST

In 2015, Hajo Müller developed and launched the ROPEROLLER, before entrusting the marketing and distribution of this innovative continuous safety system to CLIC-IT in 2025.

ROPEROLLER

Easy replacement of the lifeline for each section



Dual lifeline system for high user throughput and fast evacuation



Designed for lifeline systems positioned beyond the participant's reach

SLIMROLLER



- Compact, lightweight and smaller
- Ideal for children's rope courses

Backstop for cable



Junction



100% stainless steel construction

Designed for 10–12 mm diameter cables

MODEL

ZIPLINE MAXI LENGTH



ROPEROLLER
REFERENCE DAS800
900g



SLIMROLLER
REFERENCE DAS810
490g



The range of C-ZiP pulleys

Robust and light, our pulleys are made in forged aluminium and limit the risk of pinching fingers.

Discover our C-ZiP pulleys, all compatible with the C-HOLDER to equip your ziplines. They are designed to make guidance easier and with interchangeable wheels and bearings. Very easy and intuitive setup and removal on the cable.

For long ziplines.



C-ZIP LOCK XTREM




C-ZIP XTREM

C-ZIP LOCK SPEED // XTREM

PULLEY LOCKABLE ON THE CABLE

- Personal protective equipment
- Two bearings by wheel

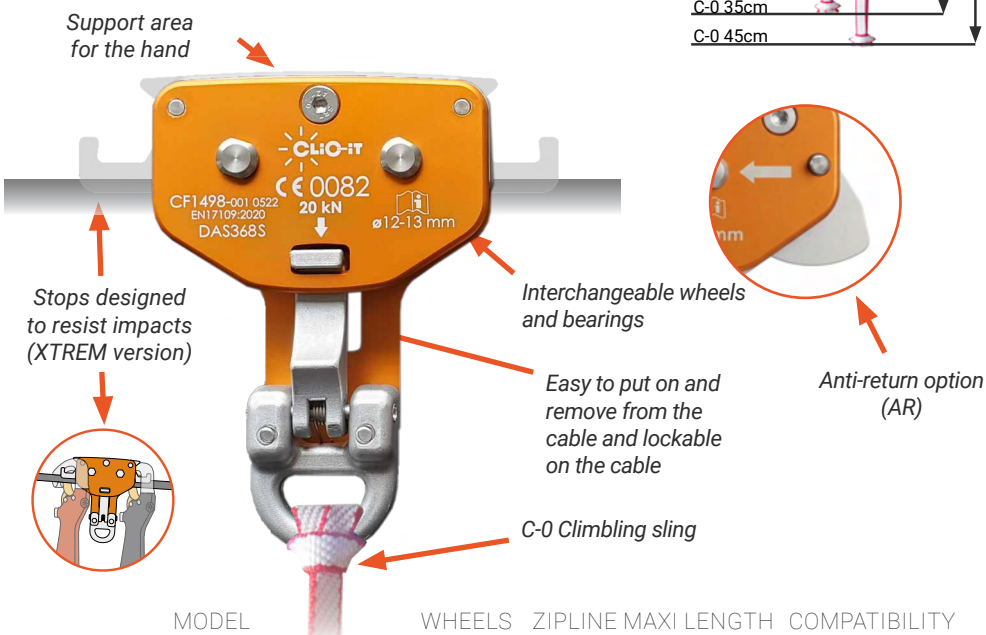

MODEL

WHEELS

ZIPLINE MAXI LENGTH

COMPATIBILITY



C-ZIP LOCK SPEED
REFERENCE DAS368S-L*
480g




EPI



C-ZIP LOCK XTREM
REFERENCE DAS368S-L*
490g




EPI



C-ZIP LOCK SPEED AR*
REFERENCE DAS368SAR-L*
520g
*Product not available in the UK and the USA




EPI



C-ZIP LOCK XTREM AR*
REFERENCE DAS368SAR-L*
530g
*Product not available in the UK and the USA



EPI





* L = length of C-0 sling (centimeter) // Example: DAS180-45 for a 45 centimeters C-0 sling

**This product is not available in the United Kingdom or the United States.

C-ZIP LOCK XTREM

NO MORE FRICTION OF THE CONNECTORS ON THE CABLE

- Two bearings by wheel
- One block forged pulley

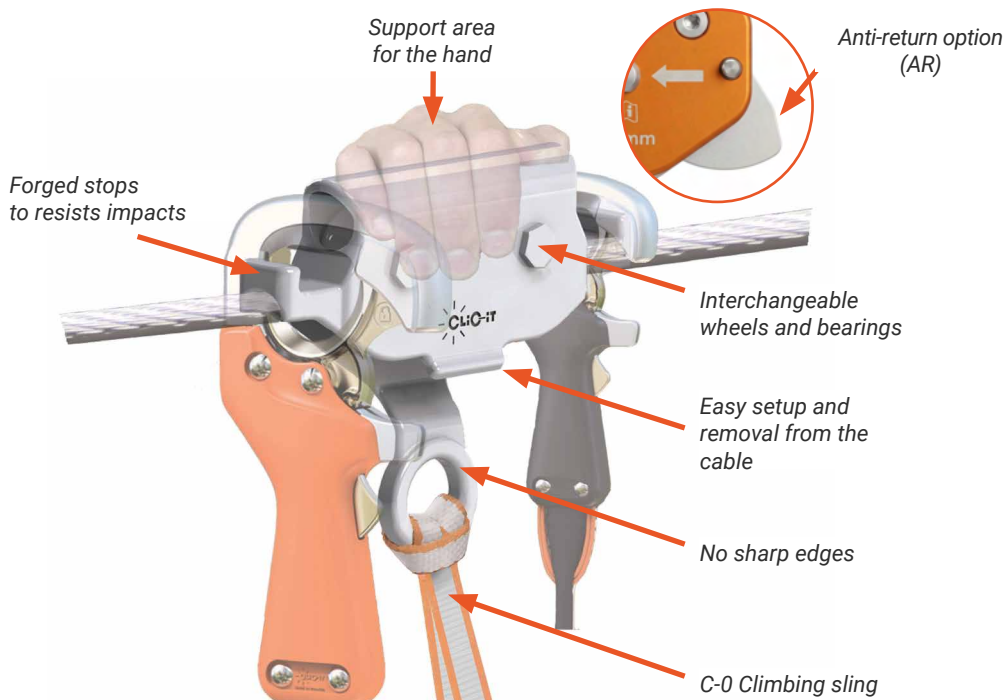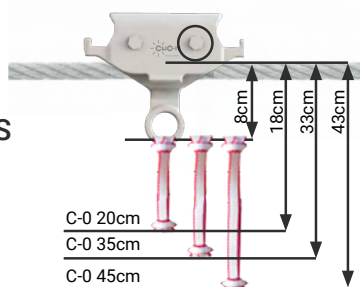

MODEL

WHEELS

ZIPLINE MAXI LENGTH

COMPATIBILITY



C-ZIP XTREM
REFERENCE DAS180-L*
407g



Steel



C-ZIP XTREM AR
REFERENCE DAS396AR-L*
440g

*Product not available in the UK and the USA



Nylon




* L = length of C-0 sling (centimeter) // Example: DAS180-45 for a 45 centimeters C-0 sling

C-ZIP AIR // C-ZIP SPEED

EASY TO USE

- Forged in two parts

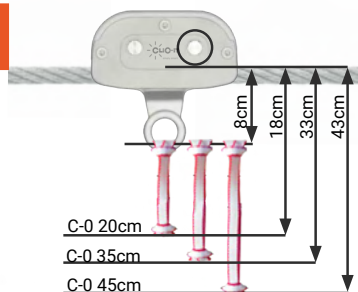

Option  (for SPEED)

Two bearings by wheel



MODEL	WHEELS	ZIPLINE MAXI LENGTH	COMPATIBILITY
 C-ZIP AIR REFERENCE DAS185N-L* 465g	 Nylon		
 C-ZIP SPEED REFERENCE DAS185-L* 530g	 Acier	 * 300m max with option 	

* L = length of C-0 sling (centimeter) // Ex: DAS185N-45 for C-ZIP AIR with a 45 centimeters C-0 sling

C-ZIP

THE RIGHT PULLEY FOR YOUR NEEDS

Zipline Length

400m

Without connector holders

With connector holders

PPE lockable



Steel sheaves

ERGONOMIC
AND EFFICIENT



C-ZIP LOCK SPEED

The best pulley on the market



C-ZIP LOCK XTREM

Lockable backstop



réas en acier

FOR MAXIMUM
SAFETY



C-ZIP LOCK SPEED AR



C-ZIP LOCK XTREM AR

Open



Steel sheaves

ÉCONOMIQUE



C-ZIP SPEED



C-ZIP XTREM

200m

Open



nylon sheaves

ÉCONOMIQUE



C-ZIP AIR



C-ZIP XTREM AIR



C-ZIP XTREM AIR AR

The easiest and quietest
to use on the market

COMPATIBILITY



Climbing sling C-0 et Sewn sling C-1 (p.38)

Equipment-carrier C-HOLDER/C-TWO (p.40)

ANODISATION OPTION



For moist & saline environments
Anti-corrosion coating

C-BODY

EASY-TO-ADJUST AND RELEASE FULL-BODY HARNESS

Low front attachment point according to EN12277 Typ A: 2015 + A1:2018




ERGONOMIQUE

- Adapted for most body types: 2 sizes available



DURABLE

- Fewer components, no padding
- Corrosion resistant
- Easy to clean
- 10 years lifetime
- 2 years warranty
- Textile protective sleeve for the traceability label

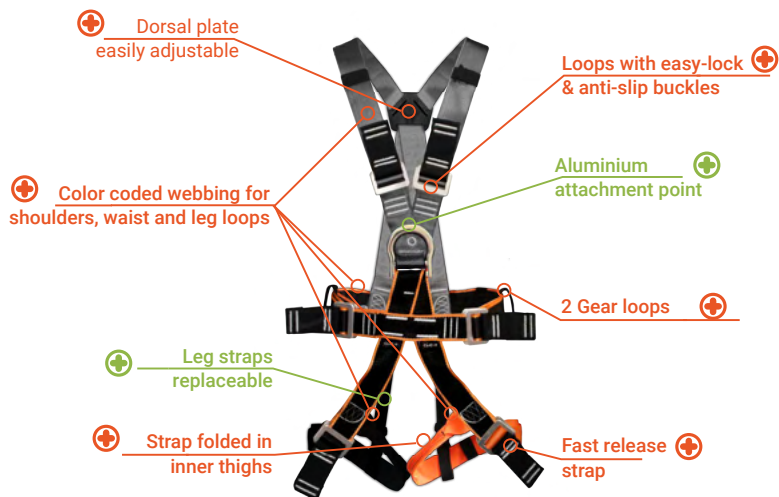

MODEL	REFERENCE
-------	-----------

C-BODY Large	DAS650
--------------	--------

C-BODY Small	DAS651
--------------	--------

COLOR Black/Grey

WEIGHT 1100g (±15g)

SIZE LARGE (S to XL) & SMALL (40kg minimum)



IKKO

THE UNIVERSAL SIT HARNESS




- Suitable for sizes 8 y.o to XXL
- Brand CILAO

MODEL	REFERENCE
-------	-----------

IKKO	IKK00AUT1
------	-----------



C-PASS ZIP

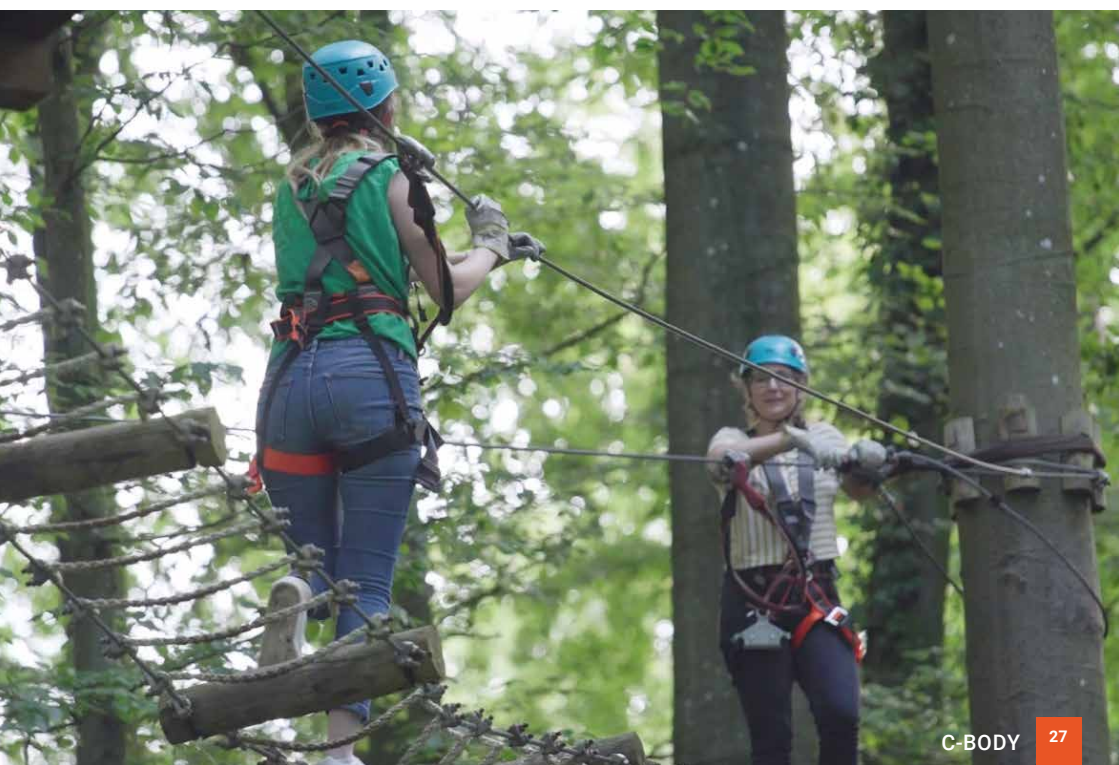

C-BODY



27

C-PASS ZIP

A SAFE AND EFFECTIVE SOLUTION TO PREVENT COLLISIONS ON ZIPLINES

- Block zipline access if someone is already engaged
- 100% automatic and mechanical lock for guaranteed reliability
- Implantable on any type of environment
- Does not require any modification of your PPE
- Autonomous energy (standard rechargeable battery, 1 month of autonomy and rechargeable overnight)

Green indicator that turns red if a person is already engaged on the zipline

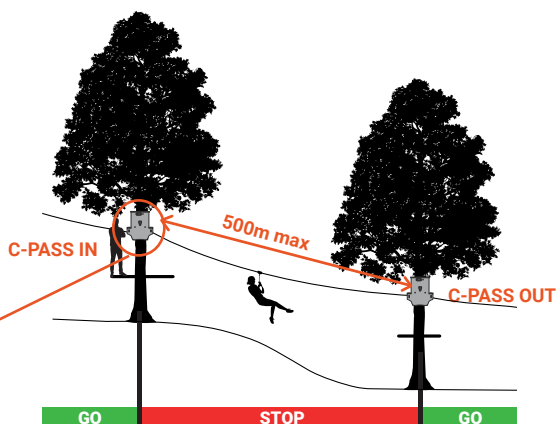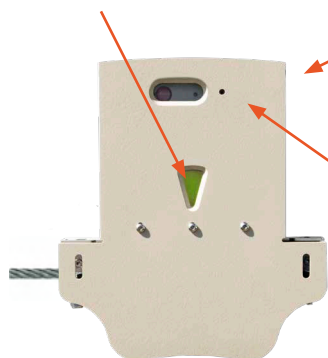

« RF » type communication system



MODÈLES



C-PASS ZIP INTERACTIVE
CONTINUOUS BELAY SYSTEM
REF: DAS501



C-PASS ZIP STRUCTURAL
CONTINUOUS BELAY SYSTEM
REF: DAS500
DAS502



OPTION (compatible with all models)






C-PiLOT
C-PASS ZIP REMOTE CONTROL
REFERENCE: DAS503

C-PASS ACCESS

PREVENTS ENTERING THE COURSE IF THE CUSTOMER IS NOT ATTACHED TO THE SAFETY LINE

- 100% automatic and mechanical lock for optimum liability
- Easy to install and to use
- Does not require any modification of your PPE

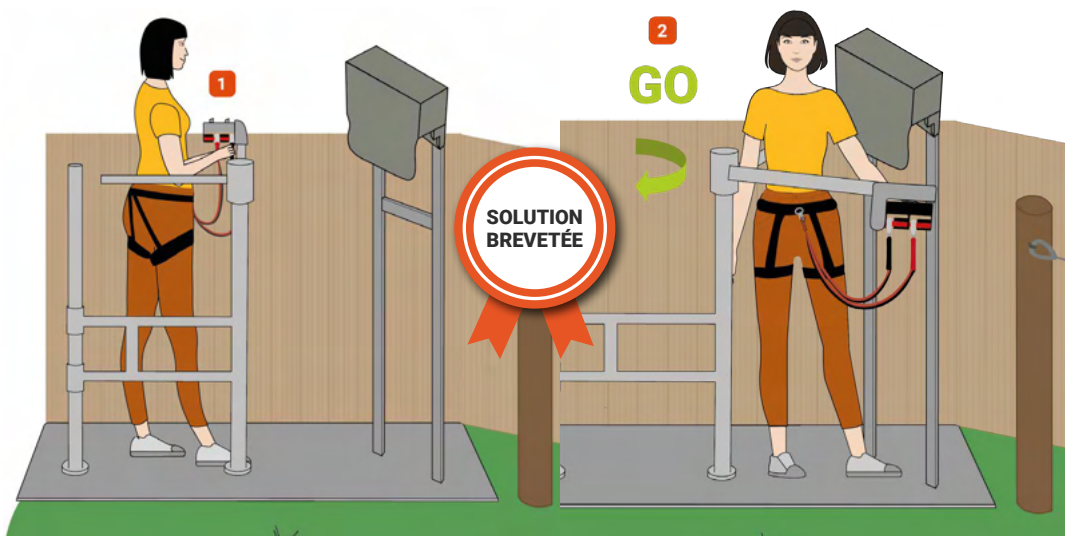

MODEL

REFERENCE

COMPATIBILITY

C-PASS ACCESS pour CLiC-iT 25

DAS510-1000-25



C-PASS ACCESS pour CLiC-iT 21

DAS510-1000-21






RODÉOSTOP®



C-ZIP LOCK XTREM

RODÉOSTOP® + KIT A1

THE SAFEST AND MOST RELIABLE AUTOMATIC FALL ARREST DEVICE

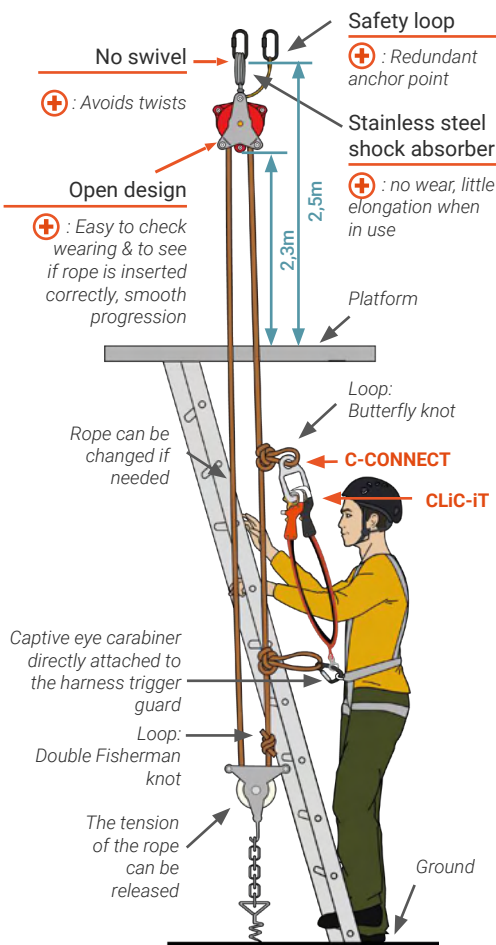


AUTOMATIC FALL ARREST DEVICE WITH ENERGY ABSORBER



Can also be fitted with a counterweight

Make sure the counterweight always holds the rope taut when the user's ascent

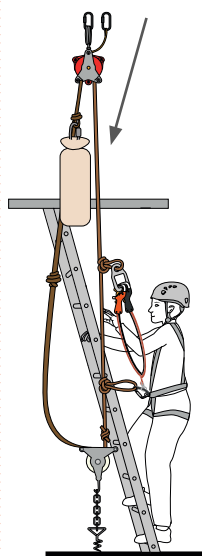

- Its pulley actuates the instantaneous blockage in the 2 directions in case of fall («back-and-forth operation»)
- If dropped, the device is equipped with a shock absorber to stop the user gently
- Using up to 35 meters depending on the length of rope
- Recommended rope: Semi-static Ø 10,5mm
- Great maneuverability (compact, lightweight ≈1kg)
- Maintenance is reduced to send for review each year (does not require lubrication)
- Norm EN360/2002 A.R.A.

KIT A1

PULLEY WITH SANDOW & ADJUSTING HOOK ON THE ROPE TENSION CHAIN

- Allows continuous and safe use because it limits the height of fall (no slack on the rope)
- A good adjustment of the tension of the vertical line with the hook on the chain down, makes the operation of the system very soft




MODEL	REFERENCE
RODÉOSTOP	B100
KIT A1	K-A1

C-UP + C-ABS

C-ZAM L+ ring
(to be ordered separately)

Steel cable
Ø 10mm - Ø 12mm



VERTICAL ANCHOR POINT

C-UP



MAGNETIC VERTICAL POINT

- Facilitates progression
- Avoid twisting lanyards to connect
- No height limit
- No maintenance


C-ABS



SHOCK ABSORBER

- Absorbs shock in the event of a fall
- Compliant with EN355:2002

Check regularly and replace every year

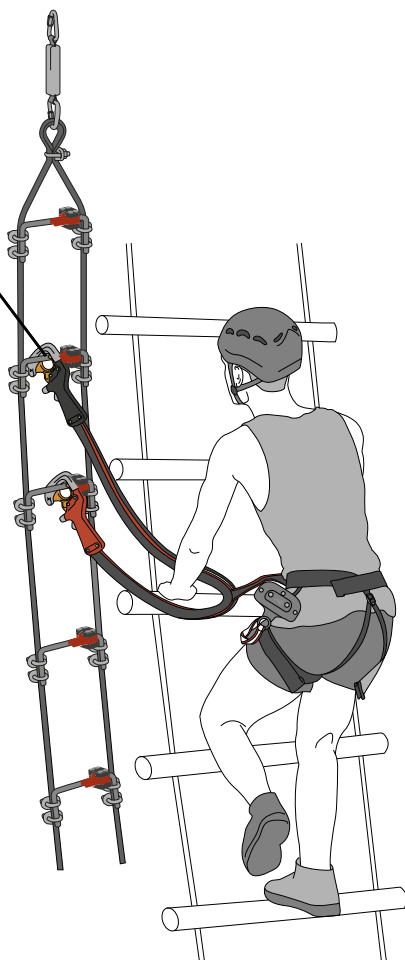

MODEL	REFERENCE	COMPATIBILITY
C-UP	DAS193	
C-ABS	DAS192	



BABO® BOLT


THE PATENTED* NATURE-FRIENDLY ALL-IN-ONE TREE-ATTACHMENT SOLUTION

+ DURABLE AND RESISTANT

*100% stainless steel
Machined in one piece*

+ COMPACT

*Ø21mm drilling
and M20 stainless
steel insert*



+ EASY MAINTENANCE

*The end of the BABO BOLT
protrudes sufficiently beyond
the tree to allow it to grow
without the need for maintenance.*

NATURE ADAPTED

- Each model is designed for a specific species to ensure optimal health

SIMPLE AND FAST

- Installation in only a few minute



In service since 2017 and validated by an expert, Andreas Detter from Tree Consult Brudi & Partner, this solution was developed by

plobaboy
Hochmayer Baumbolzen



Made in
Germany

* Patent NR. 10 2021 204 966

BABO® BOLT

ALL-IN-ONE

Both models can be used for platforms, lifelines and elements

- ⊕ For trees from Ø25cm upwards (only for BABO BOLT hardwood)
- ⊕ Drilling depth from 100mm only



Platform*



Safety line**




Elements

Softwood



Hardwood

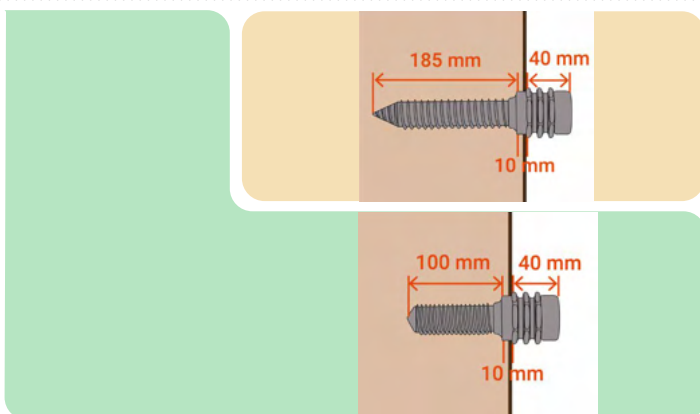

MODEL

REFERENCE

BABO BOLT for softwood

MBUA50NH160_2.0

BABO BOLT for hardwood

MBUA50_2.0

* 4 BABO BOLT per platform / ** Backup necessary


BABY BOLT

+ DURABLE & RESISTANT

100% Stainless steel

+ OPTIMIZED DRILLING AND MINIMUM TOOLS

Drilling Ø4mm
and depth 40mm



+ COMPACT

For cables Ø10mm
and Ø12mm

PROTECTS THE TREE

Prevents the safety system from rubbing against the bark of the tree

BACK-UP / REDUNDANCY

Safety line rope

SPREAD - HOLD - STIFFEN

The intermediate safety line rope

- + Quick installation: just 2 minutes, no additional hardware required
- + Compatible with all our security systems



C-ZAM Clic-iT
Ring



Clic-iT RiDER
Positioner



Clic-iT EASY
Positioner

MODEL

REFERENCE

BABY BOLT Ø10mm

SK10SSGK

BABY BOLT Ø12mm

DAS705

BABO JIG

PLATFORM DRILLING JIG

- ⊕ Time-saving
- ⊕ Can be installed by a single technician



TWO MODELS



3 arms



4 arms

ADJUSTABLE

adapts perfectly to the size of logs from Ø10cm to 14cm thanks to the shims included with each jig



Supplied with protective case

INDIVIDUALS EQUIPMENTS

C-8+ openable swivel Quick Link

Allow to attach the CLiC-iT to the harness



C8+



QUICK LINK

C-HOLDER & C-TWO

Equipment carrier allowing to hold the CLiC-iT equipment



C-HOLDER



C-TWO

C-0 // C-1 slings


Allow to attach C-ZiP, CLiC'N'ZiP & CLiC-iT to the harness



C-0



C-1

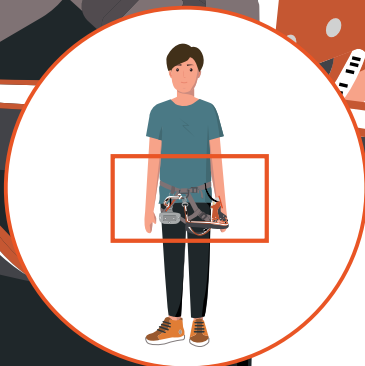

SLINGS

ENABLES THE CLIC-IT SYSTEM TO REACH THE HEIGHT
OF THE SAFETY CABLE

MOUNTAIN RING C-0



SLING C-1



SWIVELS

ALLOW FREE ROTATION PREVENTS
THE LANYARD FROM TWISTING


C-8 Swivel

CE 24kN



C-8+ Openable swivel


CE 25kN



QUICK LINK

MATERIAL
Stainless steel

CE 45kN



MODEL	REFERENCE	AVAILABLE LENGTHS	FUNCTIONAL HEIGHT	OPENING	WEIGHT
SLING C-0	DAS060-L*	20cm - 27cm 35cm - 45cm			
SLING C-1	DAS060EL-CIL-L*	55cm - 70cm 90cm - 110cm			
C-8	DAS070		52mm	/	90g
C-8+	DAS132		57mm	13mm	115g
QUICK LINK	MRNI07.0		51mm	8.5mm	52g

*L = Length of mounting ring or sling (cm) // Example: DAS060EL-CIL-55 for a 55cm C-1 sling



©-8+





C-TWO C-3WO

OTHER ACCESSORIES

C-HOLDER

C-ZIP, RIDER AND CLIC'N'ZIP EQUIPMENT CARRIER

- Pulley is easy to place on the harness & to remove from it
- Easy to fix on any harness
- Limits the risk of the pulley being caught
- Prevents the pulley from remaining attached to the equipment-carrier during a zipline

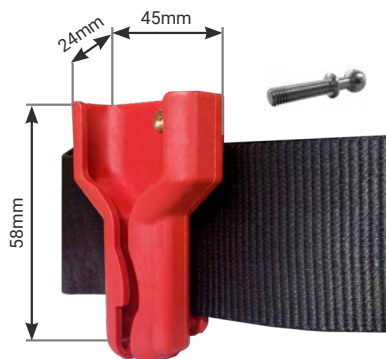

C-TWO

EQUIPMENT CARRIER

- Allows to hold the connectors or the C-ZiP pulley on the side of the harness between the courses
- Adapts to all types of harness
- Avoid to drag the connectors on the ground
- Easy fastening on the harness



MODEL REFERENCE COMPATIBILITY

C-HOLDER

DAS355



C-TWO

DAS046



• Position of the C-HOLDER on the pulley

— The use of the C-HOLDER on C-ZIP XTREM pulley or CLIC'N'ZIP lanyard you already have (previous models) requires that you return it to the workshop for modification to ensure optimal compatibility

PARK EQUIPMENTS

MONKEY HARDWARE

Climbing hold



C-CONNECT

Allow the hanging of the CLiC-iT connectors onto non-ferromagnetic parts of the course



C-STOP

Non-return mechanical stop allowing the stop during a fall



BRIEFING SIGNS



C-ZAM RINGS

Magnetic rings allowing the anchor detection of the CLiC-iT connectors



C-RACK

Storage rack for lanyards





C-OFF

Course way out allowing to remove the both connectors




C-ZAM L+

MAGNETIC RINGS FOR CLIC-IT CONNECTOR ANCHOR DETECTION

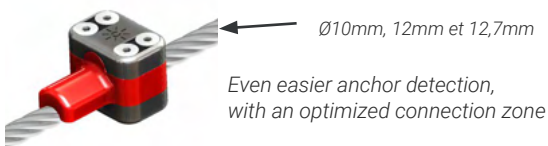

Position des aimants

Available in 5 colors:



IN +

C-ZAM RESCUE RESCUE RING

- Always have a C-ZAM ring on hand for rescues
- Clings to the belt, harness or keychain





C-ZAM RIDER

MAGNETIC RINGS ALLOWING THE ANCHOR DETECTION OF THE CLIC-IT CONNECTORS COMPATIBLE WITH THE CLiC-iT RIDER

- Allows the use of the CLiC-iT and the CLiC-iT RiDER on the same route
Adults can accompany kid(s) without changing their own equipment
- **The participant can go to the right or to the left of the ring a once connected**

Available in 5 colors:



MODEL	REFERENCE	COMPATIBILITY
C-ZAM L+	DAS148C*	
C-ZAM RiDER	DAS451C*	
C-ZAM RESCUE	DAS194	

*C = Color B = Blue; V = Green; N = Black; J = Yellow; R = Red // Example: DAS148-V for a green C-ZAM L+ Ring

C-CONNECT


ANCHOR POINTS

Enable the hanging of the CLiC-iT connectors onto non-ferromagnetic parts of the course
(with C-ZAM L+ ring for 25 and CLiC'N'ZiP models - order separately)



C-CONNECT 25

- Made of cataphoresis steel wire Ø12
- Simplified briefing. The user connects only to the C-ZAM L+ rings
- Once the first CLiC-iT connector is attached, it slides naturally to make the ring accessible to the second connector



C-CONNECT CLiC'N'ZiP

- Made of cataphoresis steel wire Ø12

15 kN



C-CONNECT V2 ET V2+

- In forged aluminium
- Ideal for «Tarzan jump» type workshops and fall arrest systems


CE 20 kN

C-CONNECT V2 C-CONNECT V2+

MODEL	REFERENCE	WEIGHT	COMPATIBILITY
C-CONNECT 25	DAS346	490g (sans bague)	
C-CONNECT CLiC'N'ZiP	DAS184	450g (sans bague)	
C-CONNECT V2	DAS170	135g	
C-CONNECT V2+	DAS175	140g	



C-ZAM L+ RING

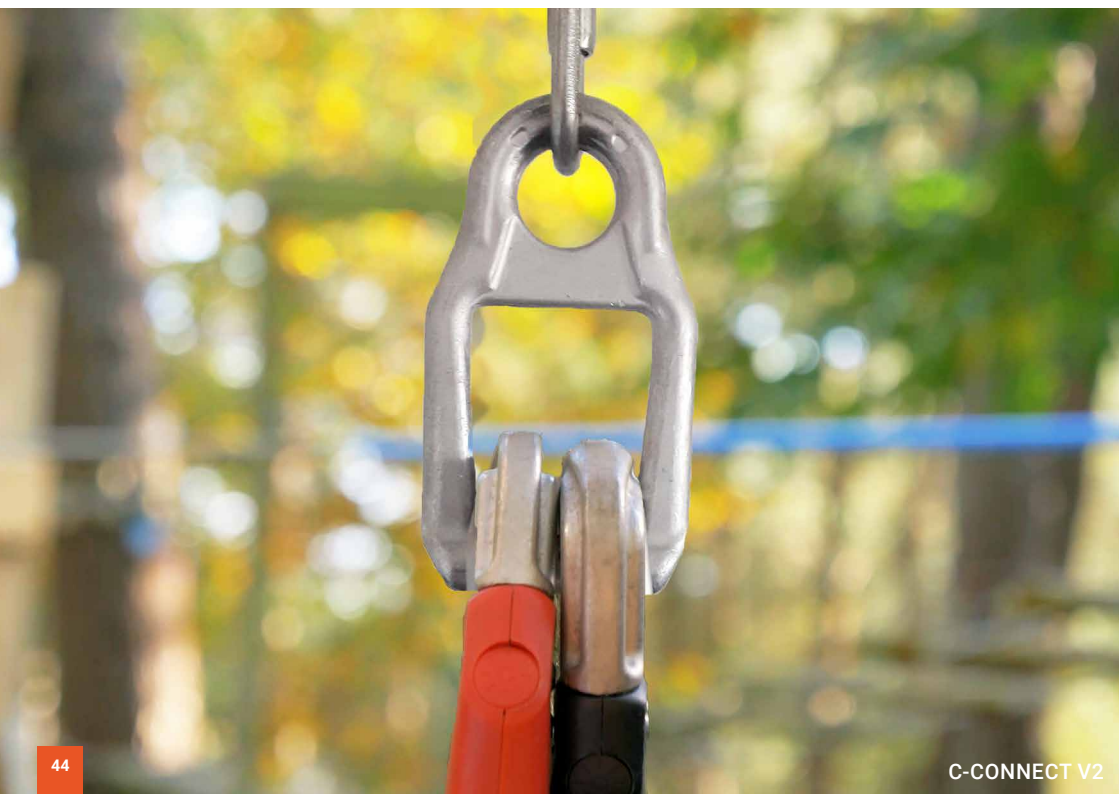

C-CONNECT V2

OTHER COURSE ELEMENTS

C-OFF

COURSE WAY OUT

- Allows the removal of the connectors from the safety cable at the entrance and at the exit of a course
- This accessory must be positioned on the safety cable only at ground level



C-STOP

NON-RETURN MECHANICAL STOP

- Allows the use of CLiC-iT connectors on sloping courses, while acting as a stop during the fall
- To be installed on a sloping course with a maximum angle of 35°



MODEL	REFERENCE	COMPATIBILITY
C-OFF	DAS044	
C-STOP	DAS075	



«MONKEY» STAND & «CAMP» HOLD

Climbing hold easy to attach on trees and to carry

- Hand and foot hold
- Climbing height: about 11 meters
- Suitable for children and beginners
- Weatherproof
- Certificated DIN EN 12572-3 & EN 1176.1



RATCHET STRAP

Steel ratchet attachment strap with integrated locking system

- Evolutionary tightening of the straps to respect the growth of the support shaft
- Easy fixing and settings
- Optimum security
- UV resistant and allowing a lasting use on trees
- Certificated DIN EN 9001:2000, ISO/TS 16949/2002



PACK «CAMP»

- 27x 3,2m ratchet straps
- 27x « Monkey » stands
- 25x Yellow Camp hold
- 25x M10 threaded screw
- 1x 6mm Allen key
- 1x carry bag



PACK EXTENSION «MAXICAMP»

- 27x « Monkey » stands
- 25x MaxiCamp hold
- 25x M10 threaded screw
- 1x 6mm Allen key
- 1x carry bag



MODEL

REFERENCE

PACK «CAMP»

1410322-J

PACK «MAXICAMP»

1411000-O

C-RACK

STORAGE RACK FOR LANYARDS

- Allows the storage of 80 CLiC-iT lanyards and preserves the lanyards control cables
- 100% stainless steel



OPTION

Inflated wheels

For unstable ground

Lanyard storage



MODEL	REFERENCE	COMPATIBILITY
C-RACK	DAS280	
C-RACK + Option	DAS287	

BRIEFING SIGNS

Series of 8 multilingual briefing signs explaining the operation of the CLiC-iT ADVENTURE hardware (model 25)

MATERIAL

Dibond aluminium

Corrosion, UV and impact resistant



DAS432-1LG*
«PRESENTATION OF CLiC-iT»



DAS432-2
«FORBIDDEN MANEUVERS»




DAS42-3
«FIX A CONNECTOR»



DAS432-4
«STARTING ON A ROUTE»



DAS432-5
«REMOVING A CONECTOR»




DAS432-6
«LEAVING A ROUTE»




DAS432-7
«CONNECT ON C-CONNECT»



DAS432-8
«HOW TO USE A C-ZIP XTREM»



DAS432-9
«HOW TO USE A PULLEY»



MODEL

REFERENCE

COMPATIBILITY

PACK PANNEAUX - C-ZiP XTREM

DAS430-LG*

PACK PANNEAUX - OTHER PULLEYS

DAS431-LG*

INDIVIDUAL SIGN

DAS432-N**



*LG = Desired language (FR/EN/DE/ES/IT) **N = Sign number

CLiC-it® PRO 60


P.P.E. FOR CONTINUOUS PROTECTION

Category 3 PPE compliant with the following standards:

EN 354 (lanyards) – EN 362 (connectors) – EN 355 (energy absorbers)

SUITABLE FOR:

- Scaffolding
- Ladders/Masts
- Anchor points
- Cables
- Straps/Ropes
- Pylons/Angle beams

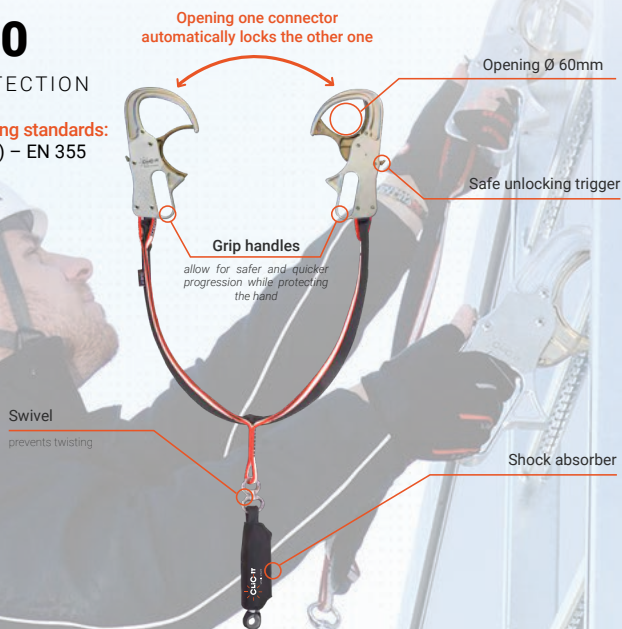

↑ DISCOVER ALSO ↓


C-RACK OZON

DISINFECTION CABINET WITH OZONE GAS

Simple, efficient and quick solution to disinfect all types of equipment. Allows the disinfection of all materials, toolings, equipments. Safe for the equipment and the operator. The ozone generator diffuses a gas inside the cabinet at the recommended threshold for a complete and perfect disinfection.

- ➔ **AUTOMATIC:** Just press a button to start the disinfection process automatically and to safety lock the system
- ➔ **FAST:** Allows the disinfection of material, tooling and equipment with no drying required
- ➔ **IMMEDIATE USE:** Ozone is drawn from ambient air and fed back in the cabinet without any other intake



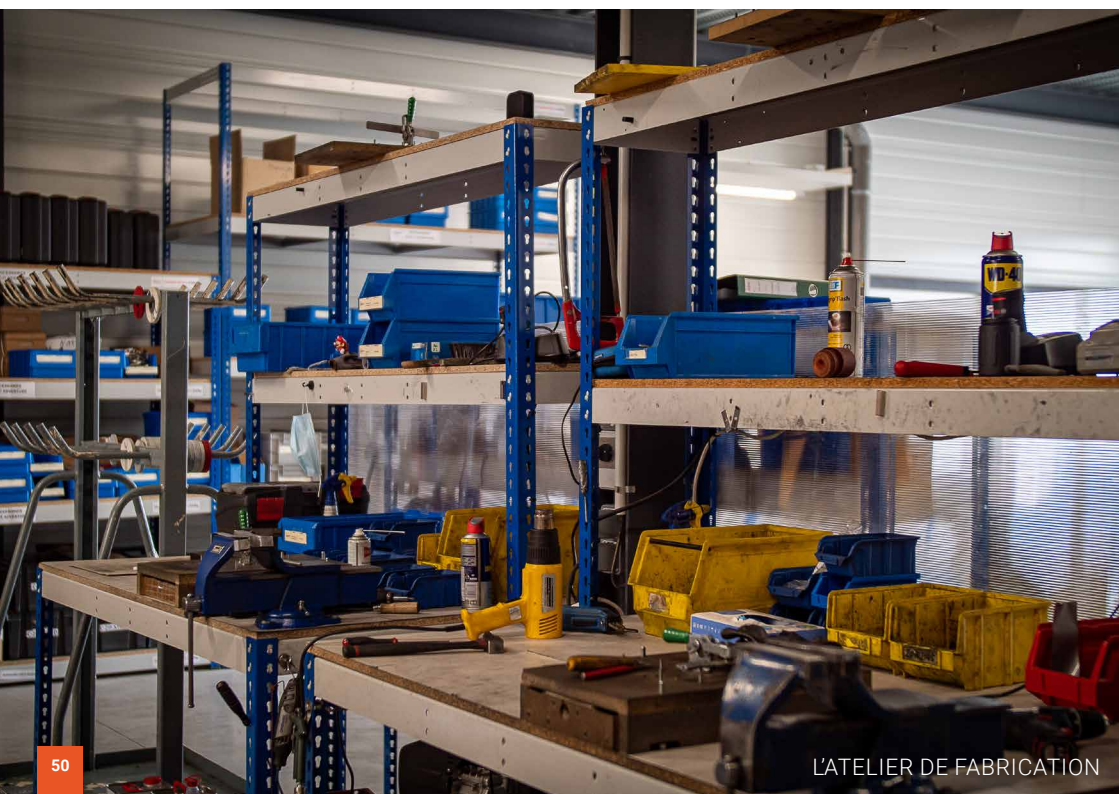



CONTACT US



CLiC-iT - SARL DEHONDT
5 rue des Terres (Cellule 7)
51420 CERNAY-LÈS-REIMS
FRANCE



+33 3 26 47 11 34



contact@clic-it.eu

www.clic-it.eu



**CLiC-iT wishes
you a fun
and safe season!**



www.clic-it.eu

